

Figure 22-2 S_1 Risk-Targeted Maximum Considered Earthquake (MCE_R) Ground Motion Parameter for the Conterminous United States for 1.0 s Spectral Response Acceleration (5% of Critical Damping), Site Class B.

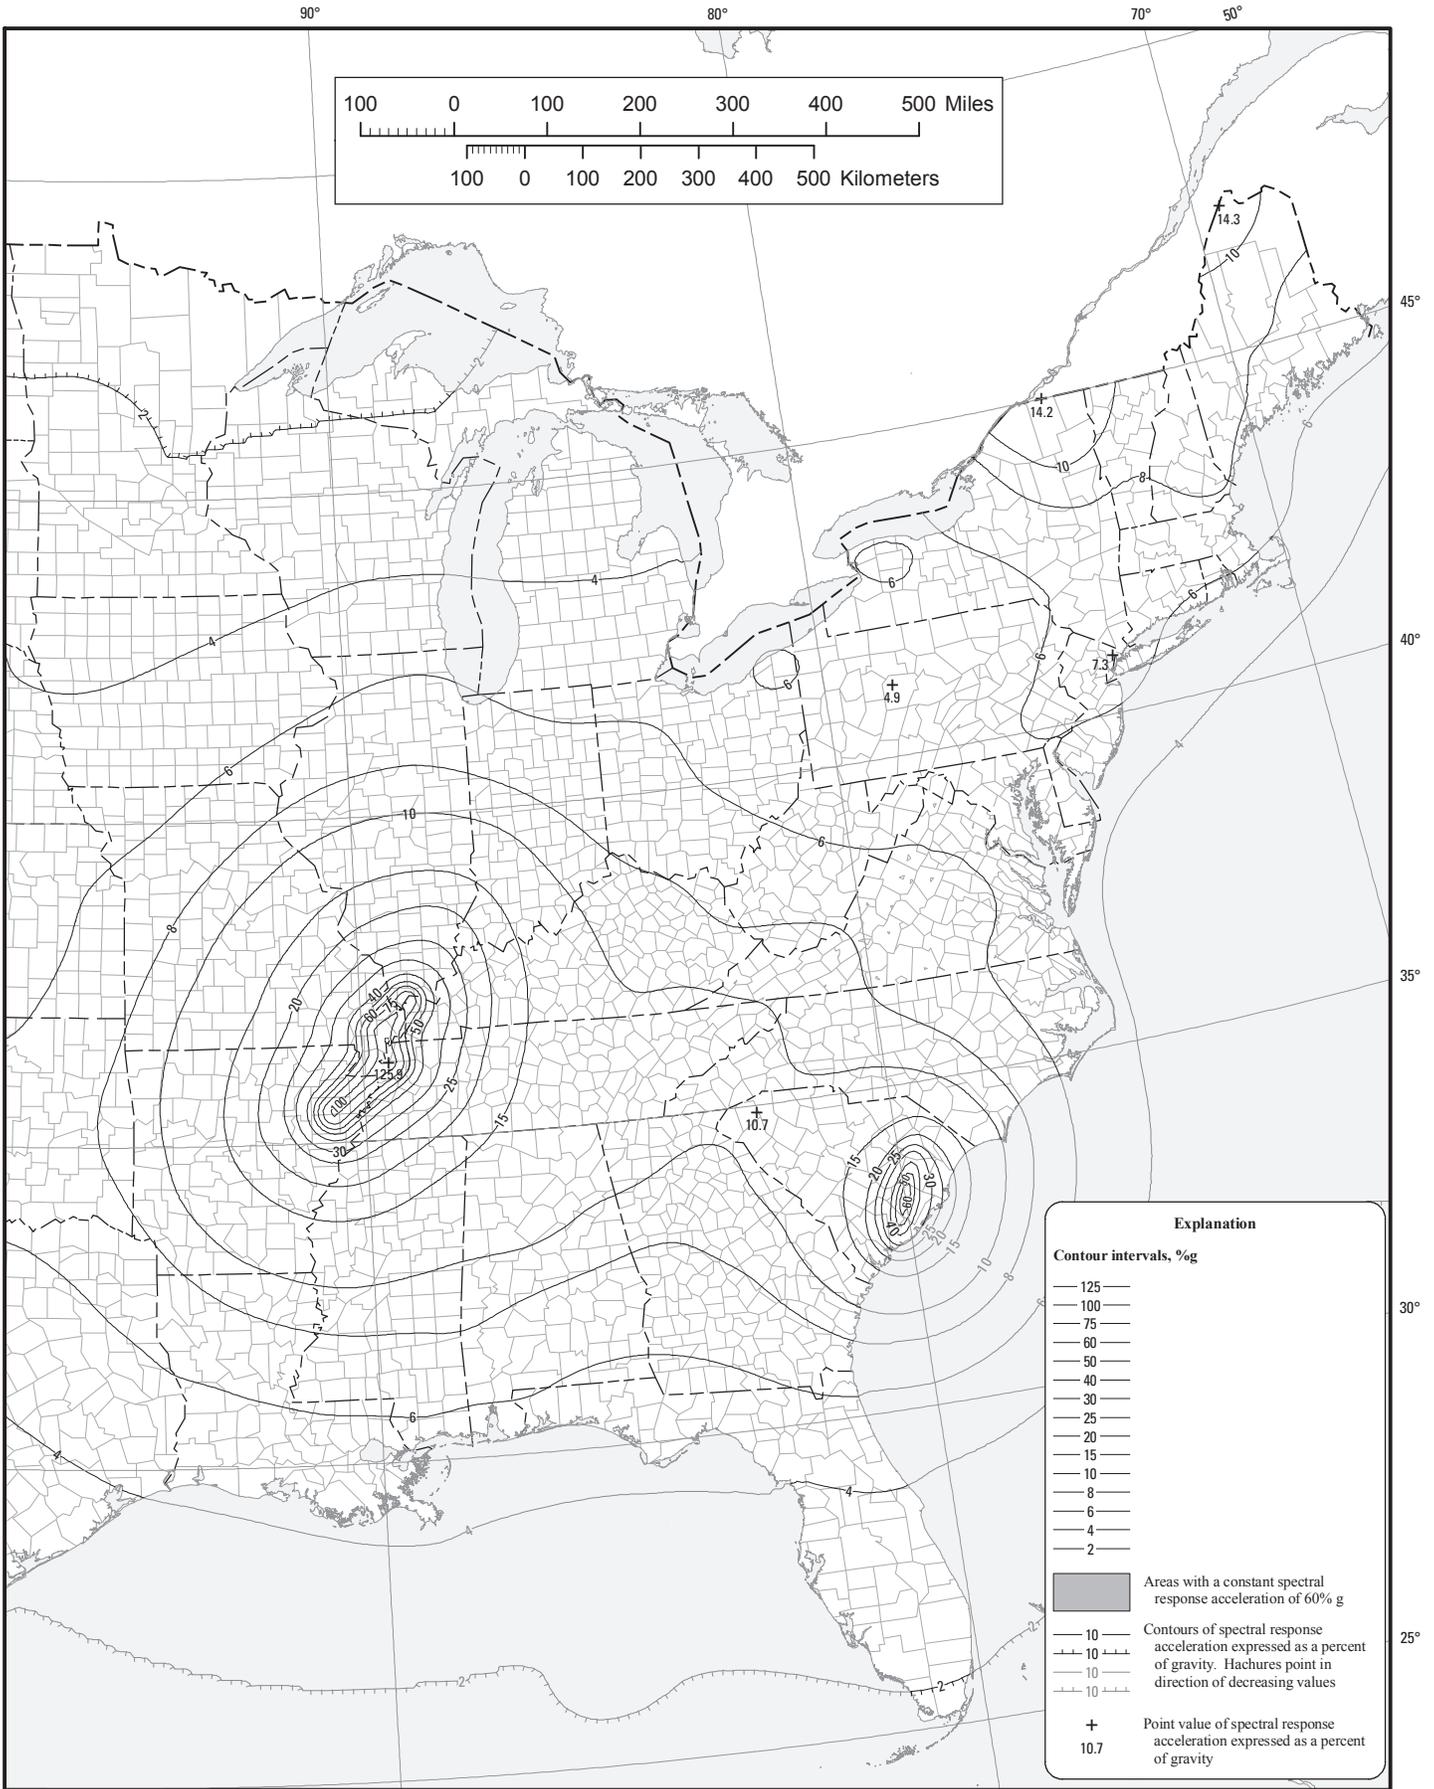


Figure 22-2 (Continued) S_1 Risk-Targeted Maximum Considered Earthquake (MCE_R) Ground Motion Parameter for the Conterminous United States for 1.0 s Spectral Response Acceleration (5% of Critical Damping), Site Class B.